
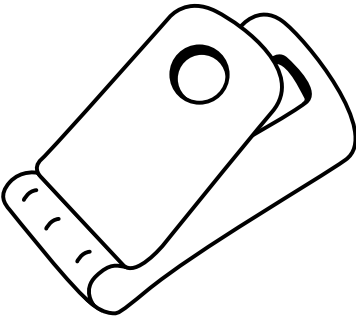





Genwork Weld Mesh Clips

FAST, CONVENIENT, EASY TO USE

	GC1 CLIP	
	Dimensions	12.5mm wide / 28mm long
	Hole Size	5mm
	Capacity	Will hold mesh from wire 1.6mm (16 gauge) to 3mm (10 gauge)
	Thickness of material	0.9mm
Coating	Zinc electroplating	

	GC2 CLIP	
	Dimensions	12.5mm wide / 30mm long
	Hole Size	5mm
	Capacity	Will hold mesh from wire 4mm (8 gauge) to 6mm (4 gauge)
	Thickness of material	0.9mm
Coating	Zinc electroplating	

	GC1 CLIP	
	Dimensions	12.5mm wide / 28mm long
	Hole Size	5mm
	Capacity	Will hold mesh from wire 1.6mm (16 gauge) to 3mm (10 gauge)
	Thickness of material	0.9mm
Coating	Zinc electroplating	

Genwork clips:


- Save welding lugs to mesh
- Give flexibility of positioning
- Provide a simple effective fixing for mesh to metal, wood, concrete or brickwork
- Can be used as a light hinge
- Ideal for fixing mesh to racking






Genwork Weld Mesh Ex-Works Prices


Mild Steel Edging Strip

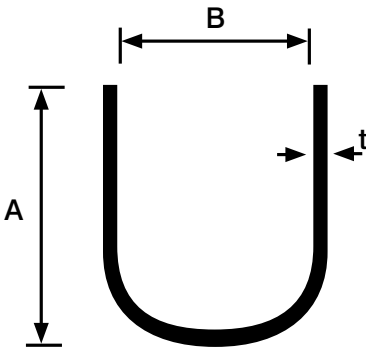

GMUP02 to 15

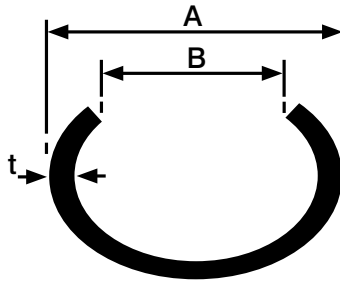

GMUP01 Only

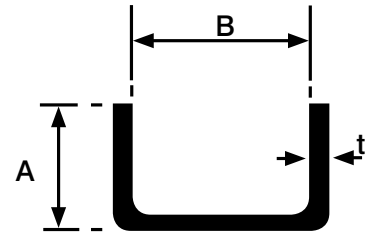

GMUP16 Only

The GMUP Range


Stock Code GMUP	Dimensions in Millimetres				
	A	B	t	Length	Kgs/Len
01	6.35	1.78	1.2	2490	0.338
02	6.25	1.8	0.6	1905	0.137
03	12.50	1.8	0.9	2540	0.510
04	19.90	1.8	1.2	3810	1.458
05	31.75	1.8	1.2	3810	2.405
06	12.50	3.4	0.9	2540	0.510
07	19.00	3.4	1.2	3810	1.458
08	31.75	3.4	1.2	3810	2.405
09	19.00	6.5	1.2	3810	1.458
09/1	19.00	5.0	1.2	3810	1.458
10	31.75	6.5	1.2	3810	2.405
10/1	31.75	5.0	1.2	3810	2.405
11	19.00	10.2	1.5	3810	1.458
12	25.50	10.2	1.5	3810	2.414
13	25.50	10.2	2.5	3810	4.023
14	38.00	10.2	1.5	3810	3.644
15	38.00	10.2	2.5	3810	6.073
16	14.30	12.7	1.5	3810	1.820
LF1 Angle	30.00	13.0	2.5	2500	2.570
LF2 Angle	25.00	7.0	1.5	2500	0.957





Genwork Weld Mesh Edging Strip

Edging Strip - Stainless Steel Range

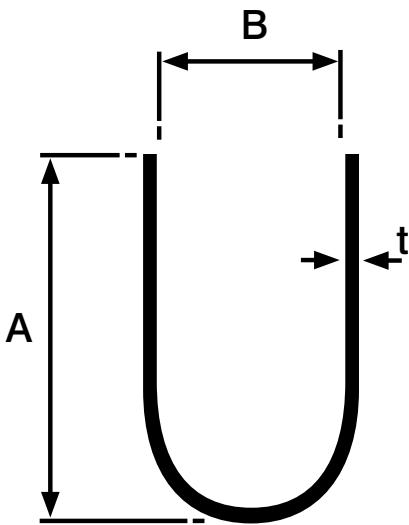

The GMUP Range

Stock Code GMUP	Dimensions in Millimetres			
	A	B	t	Length
03 SS	12.50	1.8	0.9	2540
04 SS	19.90	1.8	1.0	3810
06 SS	12.50	3.4	0.9	2540
07 SS	19.00	3.4	1.0	3810
08 SS	31.75	3.4	1.0	3810
09 SS	19.00	6.5	1.0	3810
10 SS	31.75	6.5	1.0	3810
12 SS	25.50	10.2	1.2	3810

The above sections are normally available from stock grade 304 and are supplied plastic coated for protection in transit and storage.

